

Electrical accessories

Radio

434 MHz, dip-switch coding • switching contacts, max. 230 V, 5 A

Midi-transmitter • Dip-switch coding • including 12 V battery • LED function display



| Designation | Channels | Description | W x H x D [mm] | Part no. |
|-----------------------|----------|-------------|----------------|----------|
| SKX1LC | 1 | | 43 x 83,5 x 15 | 40012142 |
| SKX2LC | 2 | | 43 x 83,5 x 15 | 40012143 |
| SKX4LC | 4 | | 43 x 83,5 x 15 | 40012145 |
| Transmitter holder LC | | black | | 40013415 |

Transmitter • Dip-switch coding • including 12 V battery • LED function display



| Designation | Channels | Description | W x H x D [mm] | Part no. |
|-----------------------|----------|-------------|----------------|----------|
| SKX1GS | 1 | | 45 x 75 x 16 | 40017859 |
| SKX2GS | 2 | | 45 x 75 x 16 | 40017860 |
| SKX4GS | 4 | | 45 x 75 x 16 | 40017861 |
| Transmitter holder GS | | black | | 40017862 |

Transmitter • Dip-switch coding • including 9V battery • LED function display




| Designation | Channels | Description | W x H x D [mm] | Part no. |
|-------------|----------|-------------|----------------|----------|
| SKX1 | 1 | | 60 x 85 x 20 | 40010623 |
| SKX2 | 2 | | 60 x 115 x 20 | 40010624 |
| SKX4 | 4 | | 60 x 115 x 20 | 40010626 |

Electrical accessories

Radio

434 MHz, dip-switch coding • switching contacts, max. 230 V, 5 A

Receiver • Dip-switch coding

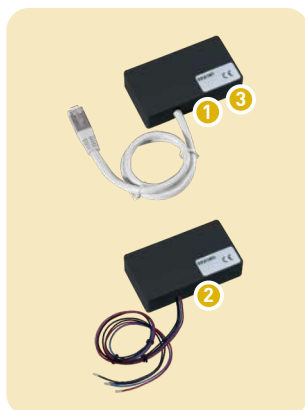

| Designation | Channels | Description | W x H x D [mm] | Part no. |
|-------------|-----------------|---|----------------|----------|
| EKX1M | 1 | UBS plug connection, to be fitted with door controls TS 970 / TS 981; Voltage 12 V-24 V AC/DC | 82 x 45 x 20 | 40014953 |
| EKX1MG | 1 | Cable connection, to be fitted with TS 961 / TS 970 models up to 06.2006; Voltage 12 V-24 V AC/DC | 82 x 45 x 20 | 40012778 |
| EKX2M | 2 ¹⁾ | UBS plug connection, to be fitted with door control TS 981; Voltage 12 V-24 V AC/DC | 82 x 45 x 20 | 40014856 |

■ 1) The two channels can only be used for OPEN commands (TS 981 with two-way traffic control)

Midi-receiver • Supply voltage 230 V AC



| Designation | Channels | Description | W x H x D [mm] | Part no. |
|------------------|----------|-------------|--------------------------------|----------------------|
| EKX1MD EKX4MD | 1 4 | | 120 x 80 x 57 120 x 80 x 57 | 40012146 40012147 |

Rod antenna



| Designation | Description | Part no. |
|---------------------|---|----------|
| Rod antenna ANT3 | With coaxial cable 3 m, for midi receiver 434 MHz, with adapter for direct connection to the receiver, length of the rod 130 mm | 40000351 |